

DSCC Pancake Load Cell

Key Features:

- Capacities 0-5kN up to 0-1000kN
- Output: 2mV/V
- Stainless Steel Construction
- High Frequency Response
- High Accuracy $<\pm 0.05\%$ /Rated Capacity
- Low Profile Shear Design
- Low Deflection
- Excellent Rejection of Extraneous Forces
- Simple Installation
- Shunt Calibration Facility
- 3 Year Warranty



For Tension and/or Compression and Force and Load Measurement Applications

The DSCC series of pancake load cells are designed for weighing and force measurement applications and can operate in both tension and compression. They are perfectly suited for material and component fatigue testing applications where a high accuracy, low-profile device is required and forces are applied axially. The DSCC's high frequency response makes it ideal for dynamic force and load measurement applications such as crash test walls.

The DSCC can be entirely customised to suit your specific application, with alternative threads, custom dimensions, counter-bored mounting holes, protection ratings of IP67 and IP68 submersible and higher capacities in excess of 5000kN possible.

For a pancake load cell with a rated capacity below 5kN for low-range measurements, please see our [DSCRC low profile load cell](#) which covers forces from 0-200N up to 0-2kN.

Options:

- Calibration/Reference Grade Versions to Meet BS EN ISO 376
- Custom Dimensions to Match Other Manufacturers Models
- Full Range of Mounting Options inc.: Load Buttons, Spherical Rod End Bearings, Mounting Bases.
- Fatigue Rated Versions.
- Higher Capacities
- Integral Cable Versions
- USB Versions (via DSC-USB)
- Vacuum/Pressurised Environments
- High/Low Temperature Versions
- Double Bridge Versions
- IP67 or IP68 Submersible Protection Rating Versions
- Counter Bored Mounting Holes
- Alternative Threads
- TEDS (Transducer Electronic Data Sheet)
- TEDS Allows Plug & Play with TEDS Enabled Instrumentation.
- Single or Multi-Channel PC-Based Monitoring & Data Logging System
- Wireless Version (via T24 instrumentation)

Applications:

- Materials Testing
- Component Fatigue Testing Applications
- Dynamic Force Applications
- Crash Test Walls
- Calibration Test Rigs
- Load Measurement Applications






Specification:

Rated Capacity (RC)	kN	0-5, 0-10, 0-25, 0-50, 0-100, 0-200, 0-250, 0-300, 0-500, 0-1000
Operating Modes	Tension/Compression / Tension & Compression	
Sensitivity (RO)	mV/V	2.0 (up to 200kN) / 2.7 nominal (250kN upwards)
Zero Balance/Offset	±%/Rated Output	<1.0
Output Symmetry (tension vs. compression)	%/Rated Load	<0.25 (0.8 typical on 250kN)
Non-Linearity	±%/Rated Output	<0.05
Hysteresis	±%/Rated Output	<0.05
Repeatability	±%/Rated Output	<0.05
Temperature Effect on Zero	±%/Rated Capacity/ °C	<0.005
Temperature Effect on Sensitivity	±%/Applied Load/ °C	<0.005
Effect of Eccentricity	%/Rated Output/25mm	<0.25 typical
Effect of Side Load	%	0.25 typical
Input Resistance	Ohms	700 nominal
Output Resistance	Ohms	700 nominal
Insulation Resistance	Megohms @ 50 Vdc	>5000
Excitation Voltage	Volts AC or DC	10 recommended (2-15 acceptable)
Operating Temperature Range	°C	-20 to +80
Compensated Temperature Range	°C	0 to +70
Storage Temperature Range	°C	-20 to +80
Safe Overload	% of Rated Capacity	150
Ultimate Overload	% of Rated Capacity	>250
Maximum Safe Side Load ** (Fx or Fy)	% of Rated Capacity	40
Maximum Safe Torque/Bending Moment	(Mx, My or Mz) **	See dimensions table
Deflection @ Rated Capacity	mm (nominal) at Rated Load	0.05 (>50kN) / 0.1 (100-250kN) / 0.13 (300-1000kN)
Fundamental Resonant Frequency*		See dimensions table
IP Rating (Environmental Protection)		IP65
Weight (excluding cable)		See dimensions table
Cable Length (as standard)	metres	3
Cable Type		6-Pin Amphenol Connector + Mating Half Fitted with 4 core screened cable, PUR sheath, Ø5
Construction		Stainless Steel
Resolution		1 part in 250,000 (with appropriate instrumentation)
Fatigue Life	Fully Reversed Cycles	Standard Versions: 30-50 million typical Fatigue-Rated Versions: 500 million Versions rated to 1 billion+ on request

*The resonant frequency is calculated with the body of the load cell attached to a large plate, ensuring that only the sensing element oscillates: This is vital to achieve the highest natural frequency and subsequent frequency response.

**Extraneous load ratings (Fx, Fy, Mx, My, Mz) are based on application of only one at any time in addition to force in the primary measurement axis (Fz). Contact our engineering department if multi extraneous loads will occur simultaneously.


Wiring Diagram:

Wire	Designation
 Red	+ve excitation
 Blue	-ve excitation
 Green	+ve signal (compression)
 Yellow	-ve signal
 Screen	To ground - not connected to load cell body

Dimensions (mm):

CAPACITY (kN)	ØA	B	C	ØD	ØE	Thread F	ØG	N holes	H	J	Deflection at RC (mm)	Resonant Frequency (kHz)	Extaneous Load Limit (Mx, My or Mz) (Nm)	Weight (kg no base)	Weight (kg with base)
0-5, 0-10, 0-25, 0-50	107	2	33	8.5	33	M20 x 2.5	90	8	35	2	0.05	5kN=3.5	30	1.5	3.7
												10kN=4.5	60		
												25kN=6.5	150		
												50kN=7.2	300		
0-100, 0-200, 0-250	155	3	45	11	60	M36 x 2	130	12	45	2	0.10	100kN=6.5	845	3.9	9.1
												200kN=7.8	1690		
												250kN=8.7	2000		
0-300, 0-500, 0-1000	278	6	78	17	118	M64 x 6*	230	16	84	4	0.13	300kN=8.7	2030	25.5	65
												500kN=8.9	3390		
												1000kN=9.0	6780		

*If you require rod end bearings please request an M64 x 4 thread. Note that the maximum rated safe static load on this size rod end is 689kN.

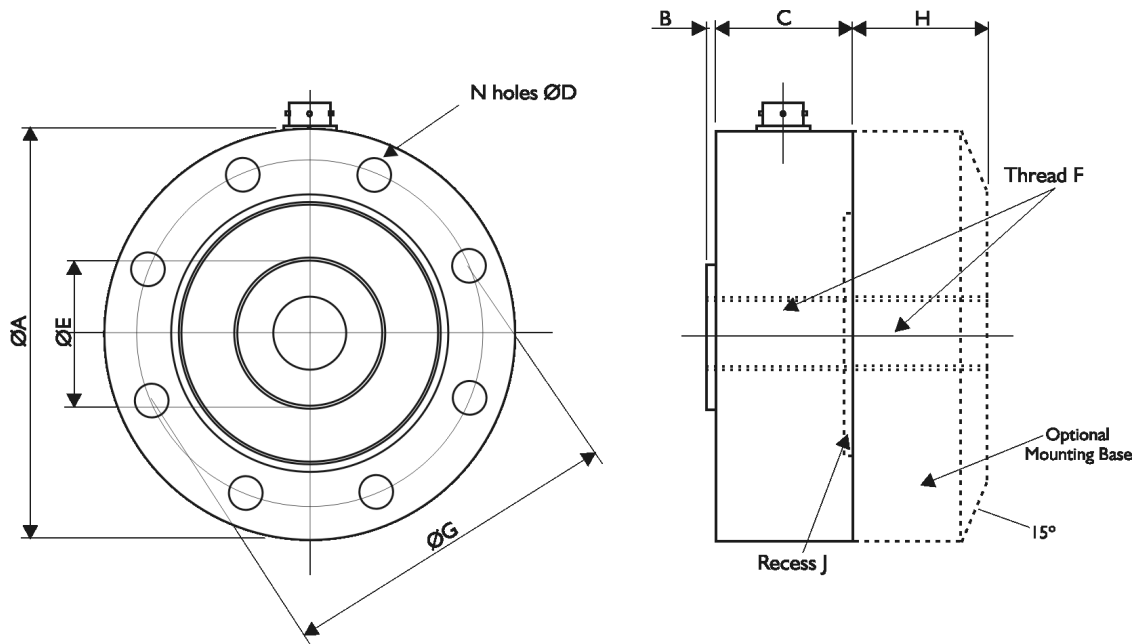

Ordering Codes:

Core Product	Capacity (inc Engineering Units)	Cable Length (m)	Specials Code	Example Result
DSCC	5kN	003	000	DSCC-5kN-003-000
DSCC	10kN	003	000	DSCC-10kN-003-000
DSCC	25kN	003	000	DSCC-25kN-003-000
DSCC	50kN	003	000	DSCC-50kN-003-000
DSCC	100kN	003	000	DSCC-100kN-003-000
DSCC	200kN	003	000	DSCC-200kN-003-000
DSCC	250kN	003	000	DSCC-250kN-003-000
DSCC	300kN	003	000	DSCC-300kN-003-000
DSCC	500kN	003	000	DSCC-500kN-003-000
DSCC	1000kN	003	000	DSCC-1000kN-003-000

Associated Products:



[TR150 Handheld Indicator](#)



[T24 Wireless Telemetry Range](#)



[Intuitive4-L Panel-Mount Indicator](#)



[DSC-USB USB Signal Digitiser](#)



[ICA Miniature Strain Gauge Amplifier](#)



[SGA Signal Conditioner/Amplifier](#)

Associated Case Studies:

[Creating 1000 Times More Power with Submersible Load Measuring Pins](#)



Measuring the strut force in Deep Green's underwater tidal energy kite assembly. The measuring device needed to withstand permanent underwater submersion. [Read more...](#)

[Shear Pin Load Cells and Draw Wire Sensors Deliver Flawless Results in Sub-Zero Temperatures](#)



Using customised DBEP shear pin load cells, the RICE team were able to successfully extract a 763m deep ice core from an ice cap on Roosevelt Island. [Read more...](#)

Mounting and Installation Accessories:

Helping You Get The Best Possible Performance From Your Load Cell.

Load Buttons and Rod End Bearings


Designed to align forces through the principle axis of the load cell thus reducing the effects of extraneous forces, hence offering improved performance from the cell.

Load buttons are used where compressive forces are applied.

Rod End Bearings are used where tensile forces are being applied.

Dimensions in mm:

Load Buttons for Compression Use

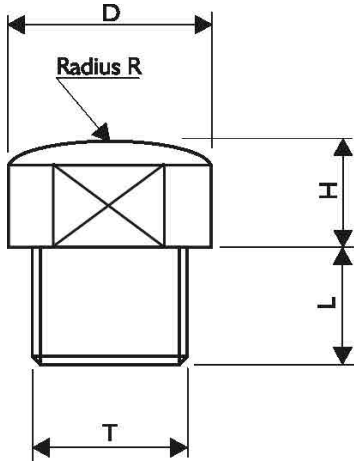

THREAD T	M20 x 2.5	M36 x 2	M64 x 6
D	33	60	118
H	14	25	50
L	26	40	65
R	200	200	400

Rod End Bearings for Tension Use

Maintenance-free rod ends are a complete units made up of a housing with both an integral shank (with an internal or external thread) and a maintenance-free spherical plain bearing, located within the housing.


Key Features:

- Supports radial loads in a tensile or compressive direction.
- Suitable for unilateral loads - can support alternating loads and alternating loads in combination with bearing GE..UK-2RS, consult sales.
- Zinc plated for corrosion resistance.
- Are maintenance-free (in bearings with Elgoglide®, lubricant leads to a considerable reduction in bearing life)
- Fitted with radial spherical plain bearings
- Hard chromium/PTFE composite or hard chromium/Elgoglide® sliding contact surfaces.
- Enables compact adjacent construction thanks to its thin walled design of the eye housing.

MMC Series Male Thread Specification - DSCC up to 50kN

DSCC up to 50kN	MMC 20K
Housing	Manganese molybdenum steel. Phosphated all over.
Ball	1% carbon chromium steel.. Heat treated. Chromium plated on the spherical surface.
Liner	Reinforced PTFE.
Stainless Steel	All the units on this page are available in stainless steel. The last letter of the designation changes from C to R. All dimensions are unchanged.
Fits	There is no measurable clearance in these rod ends in the no load condition, and the tightness of the rod end is measured by the breakaway torque which is 0-0.56Nm in a no load condition.

Load Cell	Ordering Code	B	W	H	O	D	F	A	M	X	Ball dia nom	Maximum static radial load in Newtons approx	Weight in kg each approx
		bore	ball width	housing width	ball flat dia	head dia	centre length	thread length	thread size	angle deg			
		H7	+0 -0.1	+0.1 -0.1		+0.7 -0.3	+0.7 -0.3	Min					
DSCC-5kN to 50kN	MMC 20K	20	25	18.0	24.3	50	78	46	M20x2.5	15.5	34.92	83 720	0.340

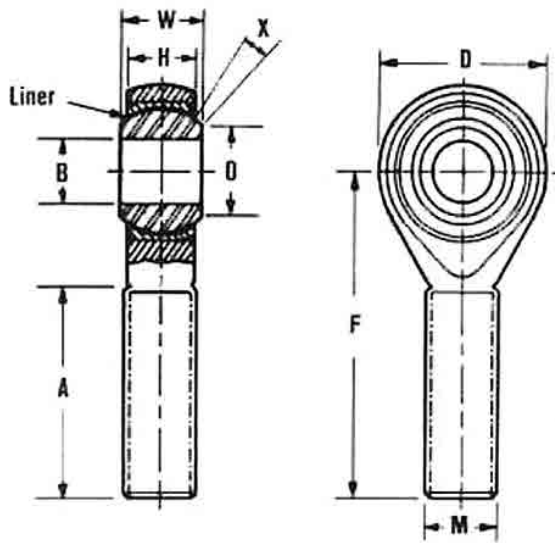


Rod End Series K - Maintenance Free - Series GAXSW - DSCC up to 250kN

For use at high tension loads up to 230kN. Consult sales for rod-end to suit DSCC-250kN.

Rod ends with male thread made from heat-treated steel, zinc plated with PTFE liner, maintenance free.

Materials:	
Housing	Heat-treated steel to 42CrMo4, Aisi 4140, forged.
Insert	Free-cutting steel to 9SMnPb28K, 12L13, with PTFE liner bonded to the inner surface.
Ball	Bearing steel to 100Cr6, Aisi 52100, hardened, ground, polished.

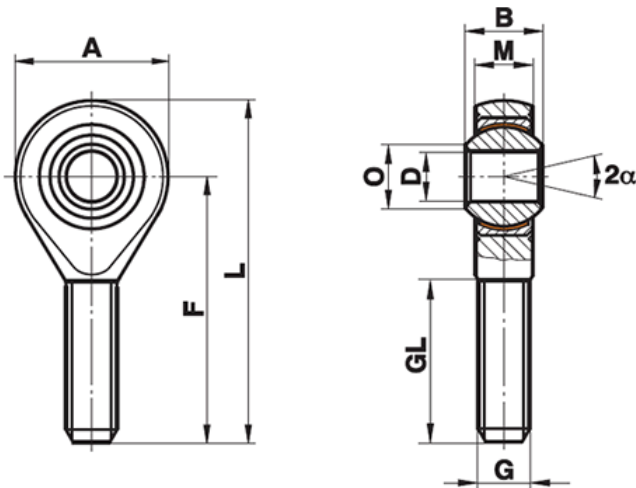

Load Cell	Ordering Code	D	B	M	A	F	L	O	G	GL	Static Load C ₀ kN	Dynamic Load C kN	Limiting Speed rev/min *	Weight g
DSCC-100kN to 200kN	GAX-SW35	35	43	28.00	80	125	165	37.7	M36x2	73	230.0	205.0	110	1600

For DSCC-250kN consult sales.

Rod End Series GAR..UK-2RS - DSCC up to 1000kN (689kN max load*)

*Consult sales for rod-ends to suit forces over 689kN.

Maintenance-free

ISO 12 240-4, dimension series E, type M


Sliding contact surface: hard chromium/PTFE

Sliding material: Elgoglide®



GAR..UK-2RS
(right hand thread)

- To ISO 12 240-4, dimension series E, type M
- Shank with external thread
- Suffix -2RS: lip seals on both sides, for operating temperatures from -30°C to +130°C

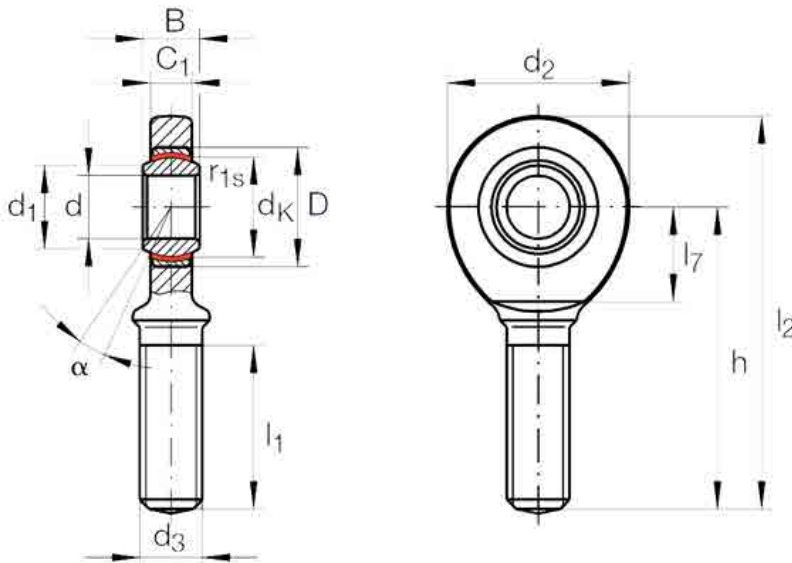

LOAD CELL	SHAFT DIAMETER	DESIGNATION		MASS ≈ kg	DIMENSIONS						
		WITHOUT SEALS	WITH SEALS		d	D	B	dk	d ₁	d ₂	d ₃
DSCC-300kN to 1000kN	80	-	GAR 80 UK-2RS	12	80 _{-0.015}	120	55 _{-0.15}	105	89.4	180	M64 x 6

LOAD CELL	h	C ₁	Degrees	l ₁	l ₂	l ₇	Chamfer Dimension r1s min.	Basic Load Ratings ²⁾		Radial Internal Clearance	Shaft Diameter d
			α					dyn. Cr N	stat. C _{0r} N		
DSCC-300kN to 1000kN	270	47	6	140	360	100	1	1 125 000	689 000	0 - 0.072	80