



SUBMERSIBLE LVDT

Position Transmitters

MACRO SSI 937 | SSIR 937

Overview

Due to their extraordinary repeatability despite variations in pressure and temperature, Macro Sensors SS 937 Series submersible LVDTs are ideal for incorporation into a wide variety of subsea measurement systems. These rugged, .94 inch [nom.] (24 mm) diameter sensors are available in standard ranges of 2.00 inches (50 mm), 3.00 inches (75 mm) or 4.00 inches (100 mm), although other ranges are available at special request.

To withstand deep-sea environments with external pressures to 5000 psi, SS Series LVDTs are constructed of Inconel. Inconel enhances the already high-reliability of the LVDT assembly, ensuring that it can meet service life requirements of at least 20 years, even if the device is fully exposed to seawater.

SS Series LVDTs also resolve the problem of getting a signal back to the surface, even at great water depths. To minimize the number of pressure sealed I/O connections and to minimize noise over long transmission lines, a 4-20 mA two-wire, loop-powered I/O is utilized. Offsets can be easily made in the data acquisition system on the platform above. Electrical termination is through a high pressure axial or radial Seacon-Brantner subsea connector.

Some typical applications include monitoring structural movement for long-term FEA (Finite Element Analysis) of pipelines, derricks, moorings and other critical high stress members on offshore oil platforms. SS Series LVDTs are designed for use in either pressure-balanced, oil-filled containers or directly in seawater.

SUBMERSIBLE LVDT

SSI 937 | SSIR 937 Position Transmitters

Benefits

- ◆ Long term reliability (20+ years)
- ◆ Inconel construction standard
- ◆ High pressure applications (to 5,000 psi)
- ◆ 4-20mA two-wire, loop-powered I/O
- ◆ Non-linearity of $\pm 0.10\%$ of FRO or better
- ◆ High pressure Seacon-Brantner subsea connector standard
- ◆ Available in either inline axial or radial connector configurations
- ◆ Welded connector also available

Applications

- ◆ Off-shore drilling platforms
- ◆ Pipeline monitoring
- ◆ Choke valves
- ◆ ROV and exploration
- ◆ Mooring cables
- ◆ Extensometers

Performance @ 25°C (77°F)

Linearity Error $\leq \pm 0.10\%$ of Full Range

Repeatability Error $\leq 0.01\%$ of Full Range

Environmental Data

Operating Pressure 5000 PSIG*

Proof Pressure 7500 PSIG*

Operating Temperature -30 to 80°C (-20 to 175°F)

Temperature Sensitivity 0.027%/°C (0.015%/°F) max.

Vibration Tolerance 20 g to 2 kHz

Shock Survival 100 g, 11 ms

Ingress Protection IP69K*

*with appropriate Seacon-Brantner mating connector


SUBMERSIBLE LVDT

SSI 937 | SSIR 937 Position Transmitters


Electrical Data

Output	4-20mA
Input	12-28VDC
Loop Resistance:	50Ω (min.) see graph at right
Current Consumption:	-
Output Noise & Ripple:	<10 μArms
Bandwidth; Electrical:	(-3dB): DC to 50 Hz
Pin A	Loop +
Pin B	Loop -
Pin C	Do Not Connect
Pin D	Do Not Connect
Pin E	Not Connected
Pin F	Case Ground


Electrical Connection



SSI (4-20 mA)
Loop Resistance (Max.) vs. Loop Supply Voltage

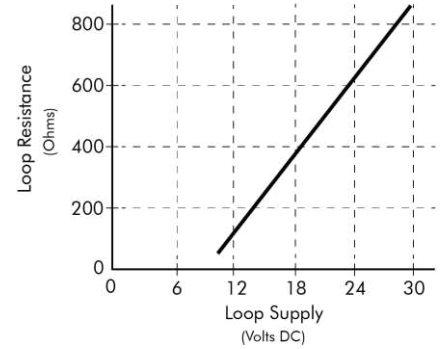

Connector Wiring



XSEE-6-BCR
Connector

Ordering Information

SS	I	R	937	4000	006
Series					
Outputs I = 4-20mA					
Connector R = Radial Leave Blank for Axial					
0.937" (23.8 mm) Body Diameter					
Range (see table above) 2000 = 2.00" (50.8 mm) 3000 = 3.00" (76.2 mm) 4000 = 4.00" (101.6 mm)					
Metric Threaded Core Option 006 = M3 x 0.5, 6H Metric Thread No suffix required for standard #4-40 UNC-2B Thread					

Dimensions



SSIR 937 Parameter	Range Code	2000	3000	4000
Range	Inches	2.00	3.00	4.00
	mm	50.8	76.2	101.6
Scale Factor	V/inch	8.0	5.33	4.0
	V/mm	0.31	0.21	0.16
Body Length "A"	Inches	8.80	11.95	11.95
	mm	223.5	303.5	303.5
Core Length "B"	Inches	4.36	6.33	6.33
	mm	111.0	161.0	161.0
Core Position "C" (at 12 mA)	Inches	1.70	2.70	2.70
	mm	43.2	68.6	68.6
Stroke "S" (S _I = Insert Stroke) (S _E = Extend Stroke)	Inches	1.00	1.50	2.00
	mm	25.4	38.1	50.8
Weight - Body	ounces	30	40	40
	g	850	1130	1130
Weight - Core	ounces	0.50	0.65	0.65
	g	14	18	18

SSIR 937

SSI 937 Parameter	Range Code	2000	3000	4000
Range	Inches	2.00	3.00	4.00
	mm	50.8	76.2	101.6
Scale Factor	V/inch	8.0	5.33	4.0
	V/mm	0.31	0.21	0.16
Body Length "A"	Inches	12.85	16.25	16.25
	mm	326.4	412.8	412.8
Core Length "B"	Inches	4.36	6.22	6.22
	mm	111.0	158.0	158.0
Core Position "C" (at 12 mA)	Inches	1.70	2.42	2.42
	mm	43.2	61.5	61.5
Stroke "S" (S _I = Insert Stroke) (S _E = Extend Stroke)	Inches	1.00	1.50	2.00
	mm	25.4	38.1	50.8
Weight - Body	ounces	30	40	40
	g	850	1130	1130
Weight - Core	ounces	0.50	0.65	0.65
	g	14	18	18

SSI 937

all dimensions in inches [mm]

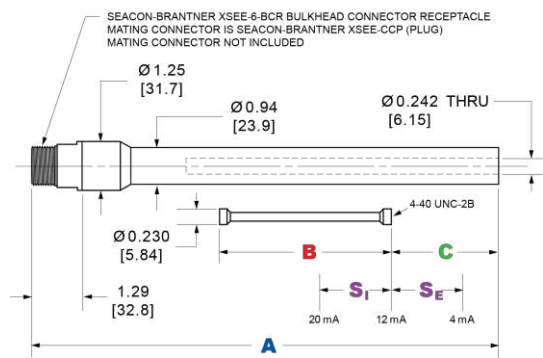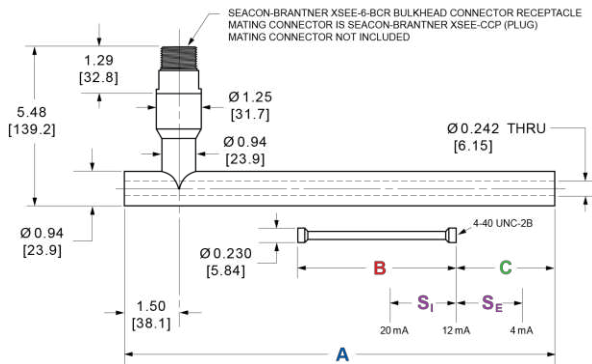

NORTH AMERICA

AST Macro Sensors,
a TE Connectivity company
Tel: 800-522-6752
Email: customer-care.pens@te.com

TE.com/sensorsolutions

AST Macro Sensors, a TE Connectivity company.

AST Macro Sensors, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.